

# SPECIFICATION FOR APPROVAL


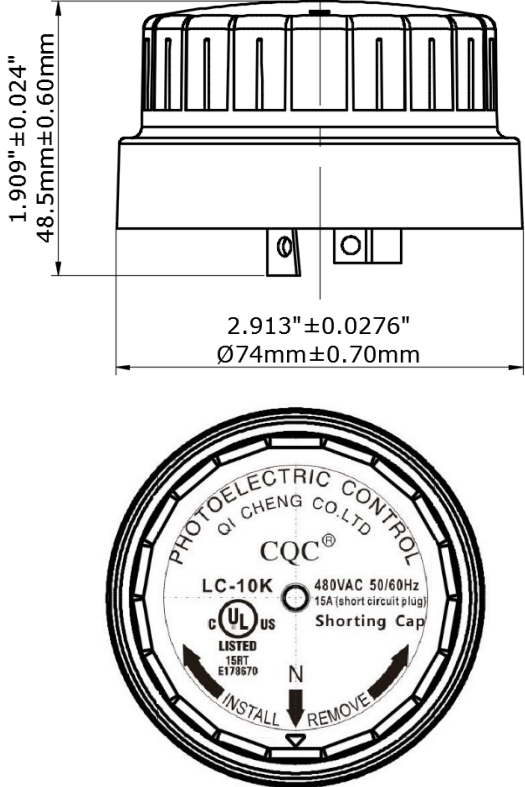
Product Name : **Shorting cap**

Model : **601. 0114**

Customer Name:
Address:
Sample Date :
Customer Approval:

<b>CONTENT</b>			
1. Appearance and Dimensions			
2. Technical parameters			
3. Packaging requirements			
4. Quality Disclaimer			
Compile	Authorize	Version	Attachment No.
		A1	/

## 1. Appearance and Dimensions

Appearance	Dimensions
	

## 2. Technical parameters

Reference/ Applicable Standards	ANSI C136.10, UL773 and NEMA.
Voltage Rating	480VAC (Max)
Rated Frequency	50/60 Hz
Load Rated	15A (Max)
Operating Temperature	-40°C to +70°C
Dielectric Resistance	2000V/1 Minute
IP Rating	IPX6
Cover Material	Black, UV-stabilized PC
Base Material	PBT
Connection:	3 pole locking type with brass contacts
Diameter	74 mm

## 3. Packaging requirements

Item	Packaging	Dimension	Quantity
Molded pulp tray	/	/	20PCS
Master carton	/	41×33×35.5 CM	100 PCS

## 4. Quality Disclaimer

The quality control objective of defective rate for this product is  $\cong 0.2\%$  (two in a thousand). CQC should be exempt from responsibility for defects within this quality objective range.